



SUGATSUNE

ALT-ST15-D360 POCKET DOOR SYSTEM

INSET/ Door Height: 19-11/16" - 63"

- Pocket Door System (Inset / Soft-Close) with door alignment adjustability.
- Featuring Olympia soft-close hinges with 5-speed precision adjustability for door closing speed.
- The damper hinges can be replaced with hinges with catch function.
- The hanging angle of the door can be easily adjusted and prevent door sag. When installing, the door can be lifted upward into 5 different angles.
- The sliding system allows doors to retract inside cabinets. Doors will not occupy space, providing full access to inside of cabinets.
- Available slide lengths: 16", 19", 22", 24" and 28".
- The fittings allow the door to retract further into the cabinet than the ALTST20-D360.
- Durability: successfully passed 40,000 open/close private cycles.




POCKET DOOR SYSTEM (INSET)

ALT-ST15-D360




- Create a clean design with doors that can conveniently pocket away.
- Can manage doors up to 63" (1600mm) tall weighing up to 33 lbs (15 kg).
- 5-speed adjustable soft-closing dampers (Uses 360 Olympia Hinges).
- 5-stage angle adjustment eliminating sagging doors.
- L-Shaped connecting plate minimizing racking and reduces door sag.
- Available slide lengths: 16", 19", 22", 24" and 28".
- Durability: successfully passed 40,000 open/close private cycles.

Installation

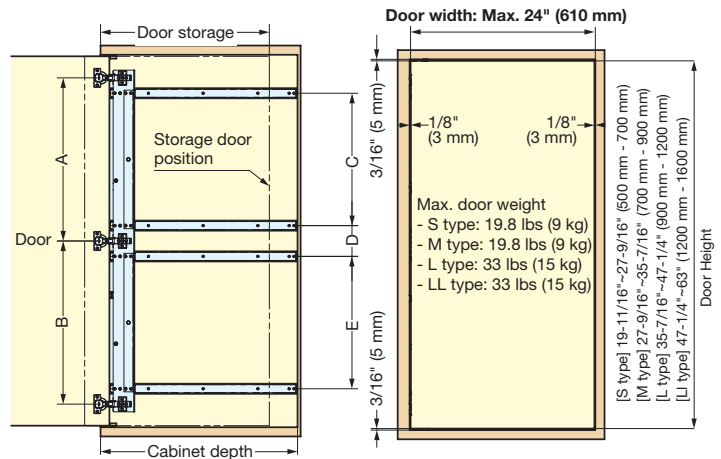


Easy Door Alignment Adjustment

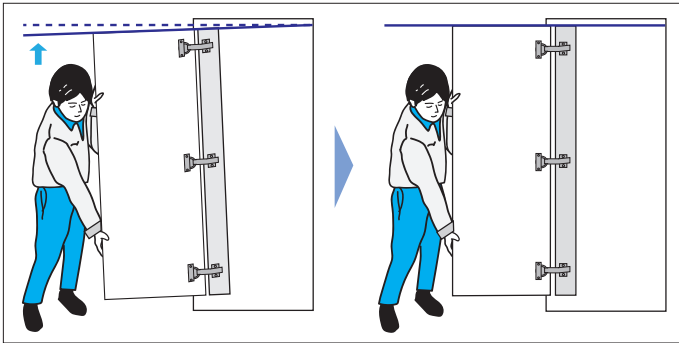


When installing, you can adjust the hanging angle just by lifting up the door.

Installation Example

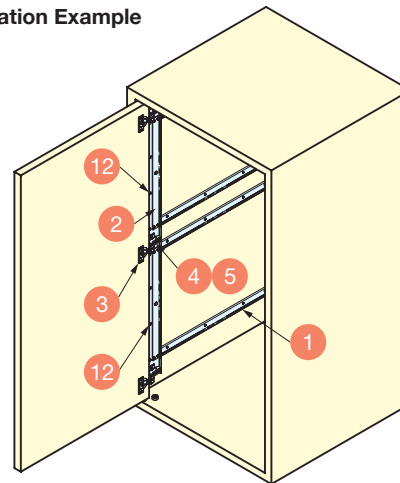

Door Cut Out Dimensions

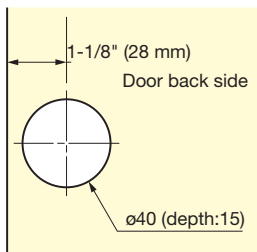

- Number of slides
- S type : 2 pairs
- M type : 2 pairs
- L type : 4 pairs
- LL type : 4 pairs

Last Digits of Item Name (Parts Set)	Door Storage Amount	Min. Cabinet Depth
16	12-7/16" (316 mm) + Thickness	16-1/4" (412 mm) + Thickness
19	15-7/16" (392 mm) + Thickness	19-3/16" (488 mm) + Thickness
22	18-7/16" (468 mm) + Thickness	22-3/16" (564 mm) + Thickness
24	20-7/16" (519 mm) + Thickness	24-3/16" (615 mm) + Thickness
28	24-7/16" (621 mm) + Thickness	28-1/4" (717 mm) + Thickness

	ALT-ST15-D360S (2 slides)	ALT-ST15-D360M (2 slides)	ALT-ST15-D360L (4 slides)	ALT-ST15-D360LL (4 slides)	
Door Width	Max. 24" (610 mm)				
Door Height	19-11/16"~27-9/16" (500 - 700 mm)	27-9/16"~35-7/16" (700 - 900 mm)	35-7/16"~47-1/4" (900 - 1200 mm)	47-1/4"~63" (1200 - 1600 mm)	
Door Thickness	11/16"~1-3/16" (18 - 30 mm)				
Door Weight	Max. 19.8 lbs (9 kg)		Max. 33 lbs (15 kg)		
Type	Hinge Placement			Slide Placement	
	A	B	C	D	E
S Type	14-3/16" (360 mm)	-	10-1/4" (260 mm)	-	-
M Type	22-1/16" (560 mm)	-	18-1/8" (460 mm)	-	-
L Type	14-15/16" (380 mm)	14-15/16" (380 mm)	10-1/4" (260 mm)	5-1/2" (140 mm)	10-1/4" (260 mm)
LL Type	20-7/8" (530 mm)	20-7/8" (530 mm)	16-15/16" (430 mm)	3-15/16" (100 mm)	16-15/16" (430 mm)